

Fraste PLG

Track Mounted Rotary Drilling Rig



DIMENSIONS

	Travelling	Working
Length:	5490mm	4100mm
Width:	1100mm	1700mm
Height:	2550mm	7000mm
Weight:	4700kg	

CAPABILITY

Pull down – 2500 daN

Pull back – 4000 daN

- 102mm dia 'Geobor S' core to 70m
- 112mm dia 'SWF' core to 60m
- 92mm dia 'PQ' core to 90m
- 72mm dia 'HWF' core to 110m
- Tri-cone O/H 216mm dia to 65m

Double clamps with breakout diameter range 40-250mm

DRILL HEAD

FX25 Dynamic Sampling Hammer

4 Speed Head


Torque / Speed range:

	Gear 1	Gear 4
Torque	350 daN	40 daN
Speed	80 rpm	680 rpm

Option: Krupp HP35A Drifter head

COMPANY HOLDING

1No.

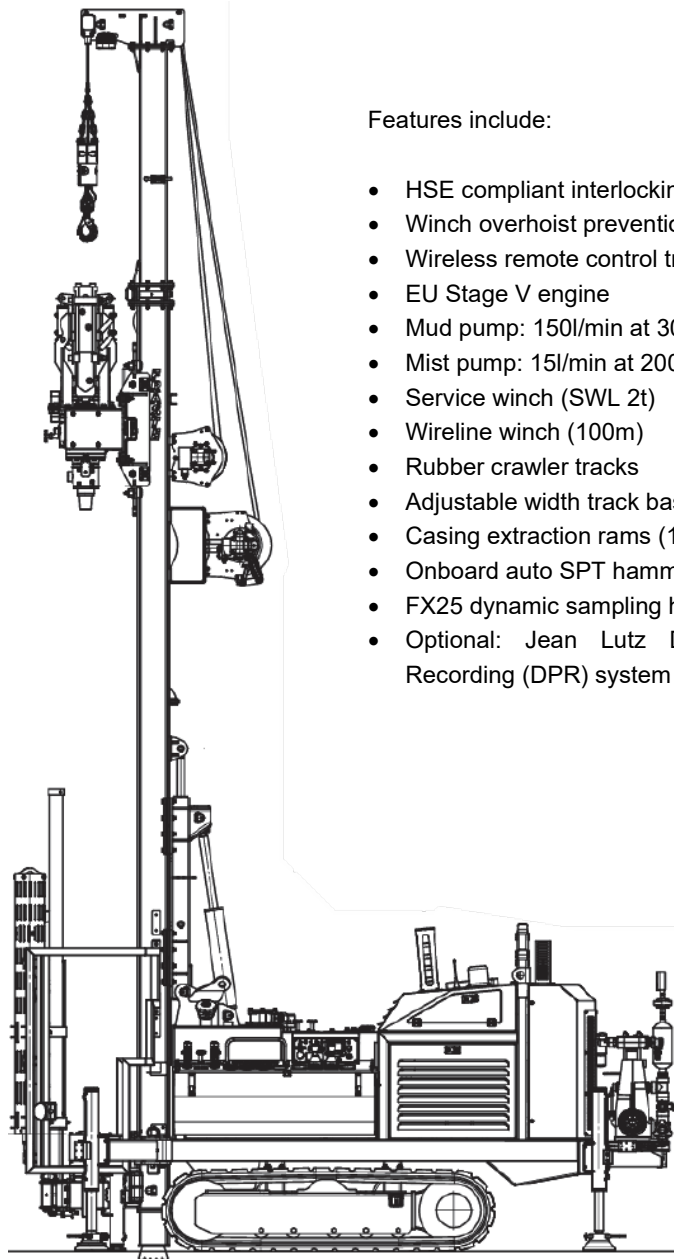

Features include:

- HSE compliant interlocking guard
- Winch overhoist prevention device
- Wireless remote control tracking
- EU Stage V engine
- Mud pump: 150l/min at 30bar
- Mist pump: 15l/min at 200bar
- Service winch (SWL 2t)
- Wireline winch (100m)
- Rubber crawler tracks
- Adjustable width track base
- Casing extraction rams (10,000 daN)
- Onboard auto SPT hammer
- FX25 dynamic sampling hammer
- Optional: Jean Lutz Drilling Parameter Recording (DPR) system