

Fraste SLG

Track Mounted Rotary Drilling Rig



DIMENSIONS

	Travelling	Working
Length:	4790mm	3240mm
Width:	970mm	1300mm
Height:	2250mm	4750mm
Weight:	2900kg	

CAPABILITY

Pull down – 2500 daN

Pull back – 2500 daN

- 102mm dia 'Geobor S' core to 40m
- 112mm dia 'SWF' core to 35m
- 92mm dia 'PQ' core to 45m
- 72mm dia 'HWF' core to 55m
- Tri-cone O/H 216mm dia to 40m

Double clamps with breakout diameter range 48-210mm

DRILL HEAD

FX25 Dyanmic Sampling Hammer


4 Speed Head

Torque / Speed range:

	Gear 1	Gear 4
Torque	350 daN	41 daN
Speed	75 rpm	610 rpm

COMPANY HOLDING

1No.

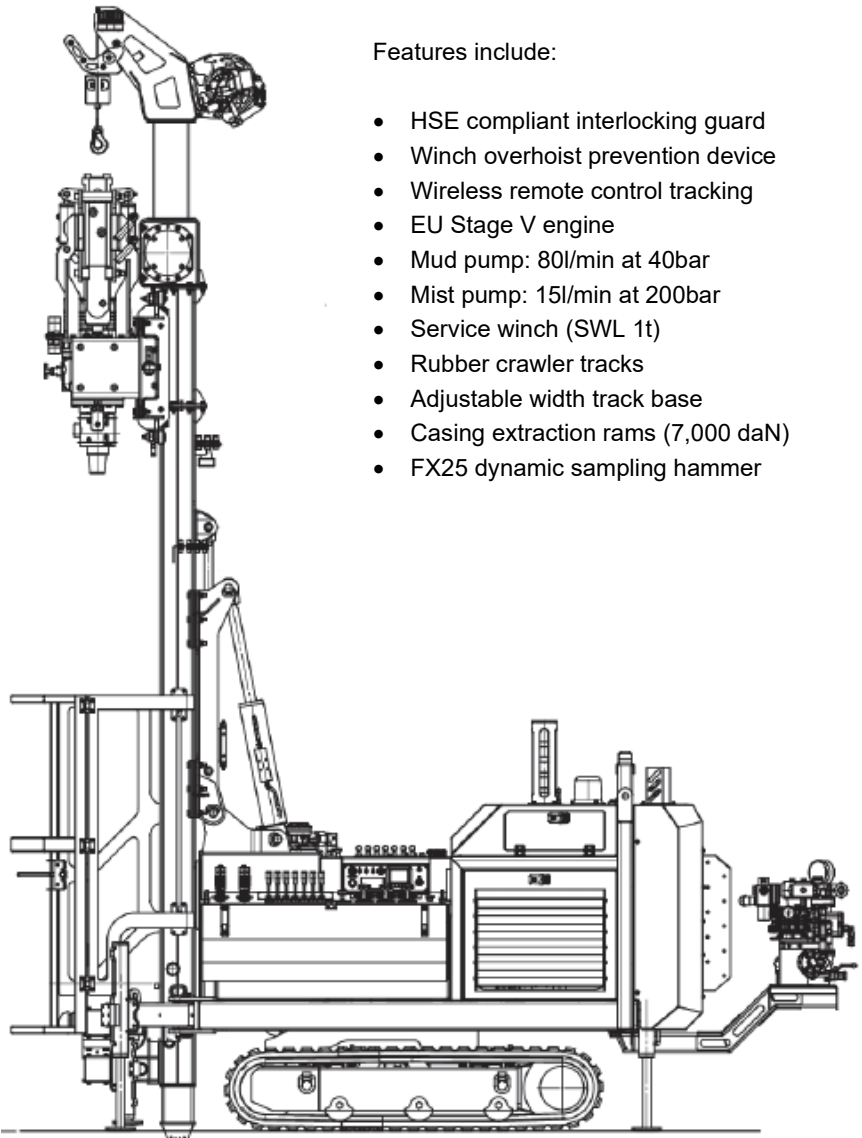

Features include:

- HSE compliant interlocking guard
- Winch overhoist prevention device
- Wireless remote control tracking
- EU Stage V engine
- Mud pump: 80l/min at 40bar
- Mist pump: 15l/min at 200bar
- Service winch (SWL 1t)
- Rubber crawler tracks
- Adjustable width track base
- Casing extraction rams (7,000 daN)
- FX25 dynamic sampling hammer