

# Fraste XL140

Track Mounted Rotary Drilling Rig

## DIMENSIONS

	Travelling	Working
Length:	9300mm	6200mm
Width:	2250mm	2500mm
Height:	3100mm	9300mm
Weight:	12000kg	

## CAPABILITY

Pull down – 6800 daN

Pull back – 10000 daN

- 102mm dia 'Geobor S' core to 300m
- 112mm dia 'SWF' core to 200m
- 92mm dia 'P' core to 400m
- 72mm dia 'H' core to 600m
- Tri-cone O/H 216mm dia to 300m

Double clamps with breakout diameter range 60-355mm

## DRILL HEAD

4 Speed Head


Torque / Speed range:

	Gear 1	Gear 4
Torque	860 daN	85 daN
Speed	80 rpm	810 rpm

Option: Krupp HP35 Drifter head

## COMPANY HOLDING

2No.

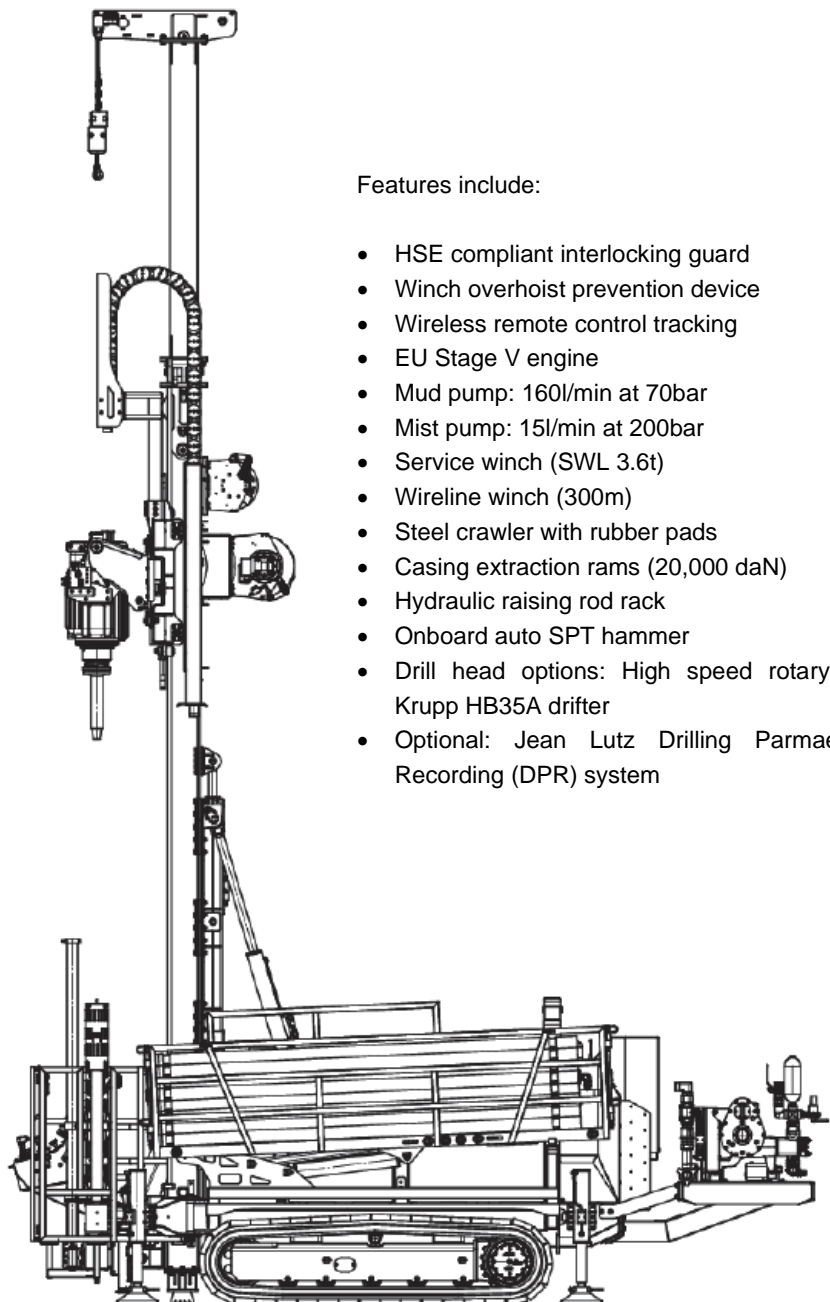

Features include:

- HSE compliant interlocking guard
- Winch overhoist prevention device
- Wireless remote control tracking
- EU Stage V engine
- Mud pump: 160l/min at 70bar
- Mist pump: 15l/min at 200bar
- Service winch (SWL 3.6t)
- Wireline winch (300m)
- Steel crawler with rubber pads
- Casing extraction rams (20,000 daN)
- Hydraulic raising rod rack
- Onboard auto SPT hammer
- Drill head options: High speed rotary or Krupp HB35A drifter
- Optional: Jean Lutz Drilling Parameter Recording (DPR) system